

GIASCO

SAFETY SHOES



BOOK **2023**



MANAGEMENT SYSTEM CERTIFICATE

DNV-GL





CERTIFICATIONS




PROMPT DELIVERY SERVICE



DESIGN



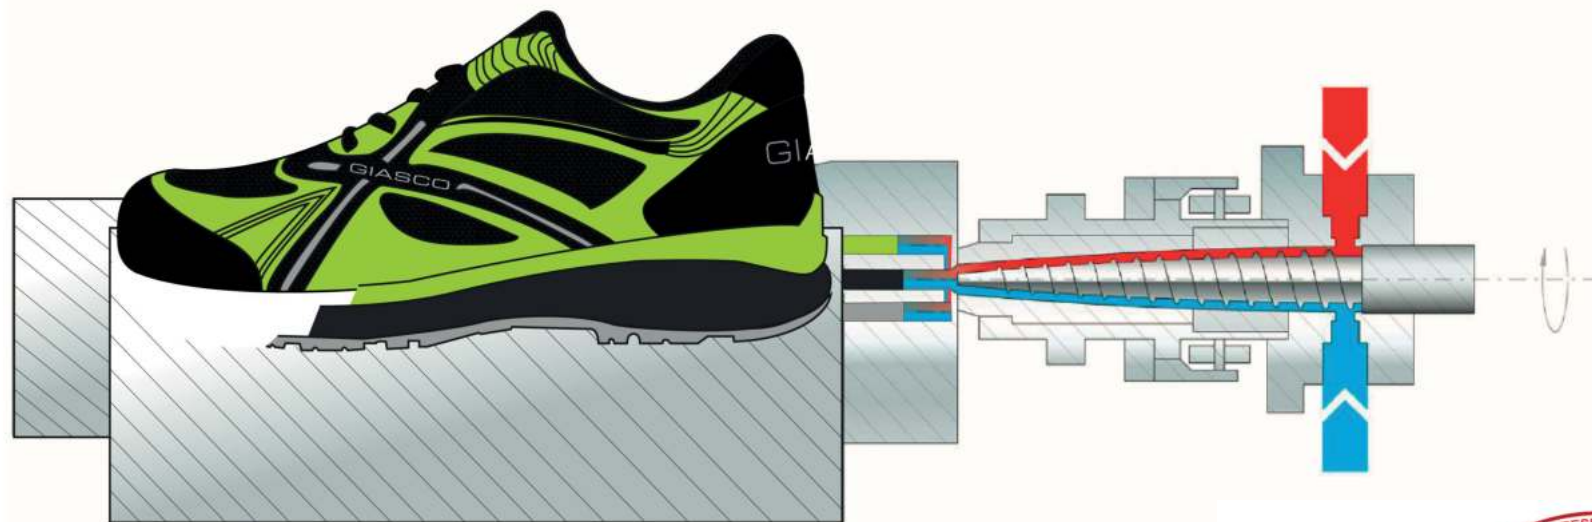

THE FIRST SHOE WITH **3** PU *DENSITIES* INJECTED



TECHNOLOGY

3PU INJECTION SEQUENCES

-  3D è una tecnologia rivoluzionaria brevettata che permette di offrire l'unica calzatura con 3 diversi strati di poliuretano iniettati su tomaia. Obiettivo di questo prodotto è quello di offrire Sicurezza, il massimo Comfort e una sicura Stabilità del piede grazie alle 3 densità che caratterizzano i vari strati della suola.
-  3D is a patented revolutionary technology that allows us to offer the only shoe with 3 different layers of polyurethane injected on the upper. The aim of this product is to offer Safety, maximum Comfort and Secure foot stability thanks to the 3 densities that characterize the various layers of the sole.
-  3D es una tecnología revolucionaria patentada que nos permite ofrecer el único zapato con 3 niveles diferentes de poliuretano inyectados en el corte. El objetivo de este producto es ofrecer seguridad, el máximo confort y una estabilidad segura del pie gracias a las tres densidades que caracterizan las distintas capas de la suela.
-  3D est une technologie révolutionnaire brevetée qui nous permet d'offrir la première chaussure avec 3 couches différentes de polyuréthane injecté sur la tige. Le but de ce produit c'est d'offrir sécurité, un confort optimal et de garantir la stabilité du pied grâce aux 3 densités qui caractérisent les différentes couches de la semelle.
-  3D ist eine revolutionäre und patentierte Technologie, die es gestattet einen einzigartigen Schuh mit drei verschiedenen Schichten aus in das Oberleder injiziertem Polyurethan anzubieten. Das Ziel dieses Produkts ist es, dem Fuß dank der drei unterschiedlichen Dichten der verschiedenen Schichten der Sohle einen maximalen Komfort sowie eine sichere Stabilität zu bieten.

3ULTRA

**TRIPLE YOUR
RESISTANCE**



3CROSS

**TRIPLE YOUR
STABILITY**



3ULTRA RUBBER

**TRIPLE YOUR
RESISTANCE**



3HYBRID

**TRIPLE YOUR
COMFORT**



3RUN

**TRIPLE YOUR
STYLE**



3MOVE

**TRIPLE YOUR
MOBILITY**





3PU PATENT


BULTRA



NO METAL



MONDO POINT 11



PS



SR



A



E



FO



SC



WPA



TECHNOLOGY
3PU INJECTION SEQUENCES



ANTI-TORSION INSERT

BENDING POINT

ANTI-SLIPPING HEEL

TILTED HEEL TO
IMPROVE THE WALKING

ANTISHOCK



COMFORT

STABILITY

ANTISLIP





OPAL S1PS FO SC SR 3U434N
37-49



SILVER S7S FO CI SC SR 3U451L
37-49



GOLD S7S FO CI SC SR 3U458L
37-49



ZIRCON S3S FO SC SR 3U481D
37-49





TOPAZ S3S FO SC SR 3U488D
37-49



QUARTZ S3S FO CI SC SR 3U017G
39-47



BULTRA RUBBER



ICE GRIP
PATENTED
outsole design

ANTI-TORSION INSERT

BENDING POINT

TILTED HEEL TO
IMPROVE THE WALKING

ANTI-SLIPPING HEEL

ANTISHOCK





TM



NEW

LOBBIA S7S FO CI HI HRO SC SR 3RUB451L
38-49



NEW

TRIGLAV S7S FO CI HI HRO SC SR 3RUB458L
38-49



NEW

AROLLA S7S FO CI HI HRO SC SR 3RUB459L
38-49



NEW



MARMOLADA S7S FO CI HI HRO SC SR 3RUB179E
38-47



ULTRA RUBBER

ICE GRIP
PATENTED
CLASSIC DESIGN



3PU PATENT

3MOVE



NO METAL



MONDO POINT 11



ROOF GRIP



A



E



FO

SRC
ANTI-SLIPPING SOLE


*extra
LIGHT
shoes*



TECHNOLOGY
3PU INJECTION SEQUENCES



PATENTED
outssole design

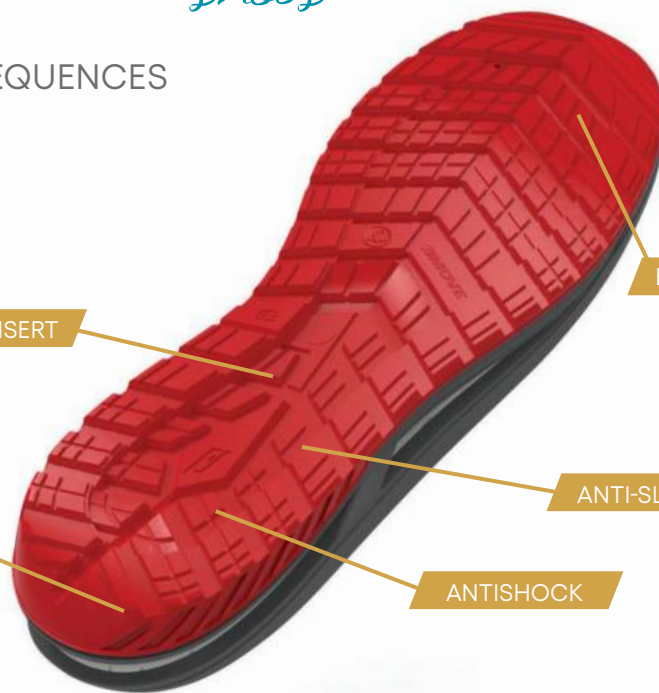



NEW

FOX S3
36-47

3M453N



NEW

TIGER S3
36-47

3M457N



NEW

LION S3
36-47

3M184K



NEW

CHEETAH S1P
39-47

3M184Y



NEW



LEOPARD S1P
36-47

3M454T



NEW



SHARK S1P
36-47

3M450N



NEW



MAKO S1P
36-47

3M182T



NEW



FALCON S3
36-47

3M474NA





3PU PATENT

3HYBRID



NO METAL



MONDO POINT 11



ROOF GRIP



A



E



FO

SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*



TECHNOLOGY
3PU INJECTION SEQUENCES



ANTI-TORSION INSERT

BENDING POINT

TILTED HEEL TO
IMPROVE THE WALKING

ANTI-SLIPPING HEEL


ANTISHOCK



COMFORT

STABILITY

ANTISLIP

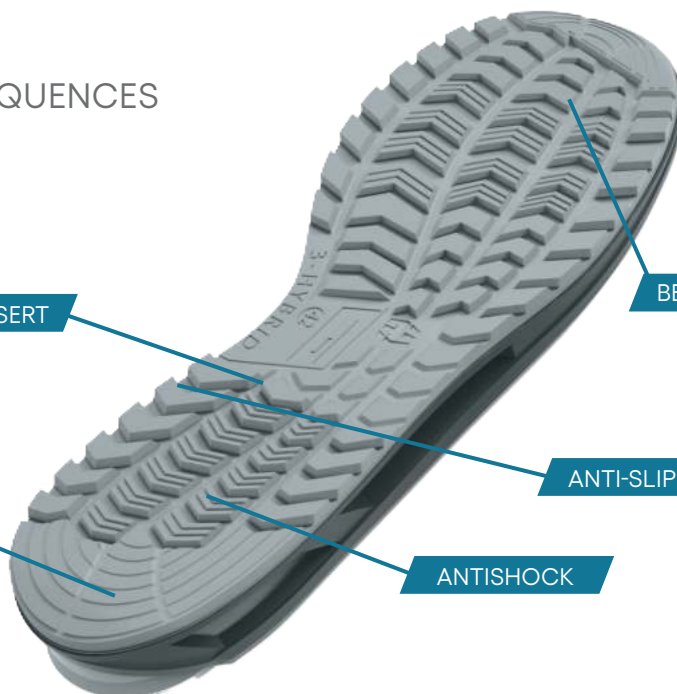



PAG S3L FO SR
36-47

3H063N



KRK S3L FO SR
36-47

3H149N



SAMOA S1P
36-47

3H085N



FIJI S3
39-47

3H142EV



BALI S3
36-47

3H149EV






LAS VEGAS S1P
36-47

3H154EC



IBIZA S3L FO SR
36-47

3H154NK

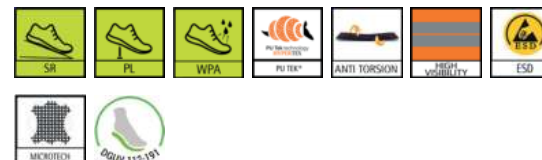

LIPARI S1PL FO SR
36-47

3H182NG



PONZA S3L FO SR
36-47

3H025NG



BORNEO S3
36-47

3H037NG





ARUBA S3
36-47

3H192EV



MYKONOS S1P
36-47

3H192ER



BURGAZ S1P
36-47

3H184J



GOTLAND S1P
39-47

3H224EJ





FUERTEVENTURA S1P
36-47

3H433N



PANAREA S1P
36-47

3H174V



MALÈ S3
39-47

3H022H



SYLT S1P
39-47

3H432Y





TM



USTICA S2
36-47

3H002I



CORFU S2
36-47

3H002O



MAUI S3
36-47

3H191I



ZANTE S1P
36-47

3H095I



MINORCA S2
36-47

3H020I



CHEMICAL RESISTANCE

BLACK MICROWASH
Laboratory tests for the determination of chemical resistance (sodium hydroxide 40 % K) of upper material in accordance with analogue method EN 13832-3:2018.

WHITE MICROWASH
Laboratory tests for the determination of chemical resistance (N, P, R, K, NaCl 37%*) of upper material in accordance with analogue method EN 13832-3:2018.

Laboratory tests for the determination of chemical resistance (N, P, R, K, NaCl 37%) of SOLE material in accordance with analogue method EN 13832-3:2018.

- KUBE/ERGO black;
- KUBE white;
- 3CROSS/3RUN orange;
- 3HYBRID/ERGO light grey.

* K - sodium hydroxide 40 %; N - acetic acid 99 %; P - hydrogen peroxide 30 %; R - sodium hypochlorite (13 ± 1) % of active chlorine; NaCl 37% - sodium chloride 37%;



3PU PATENT

3CROSS



NO METAL



MONDO POINT 11



A



E



FO

SRC
ANTI-SLIPPING SOLE



TECHNOLOGY
3PU INJECTION SEQUENCES





TM

3PU PATENT

3CROSS



STELVIO S3 CI
39-47

3C224N



NEW

CERVINO S3L FO SR
39-47

3C184G



MAKALU S3 CI WR
38-47

3C058G



K2 S3 CI
39-47

3C149E



HIMALAYA S3 CI WR
39-47

3C178E





ANETO S3

3C1910

36-47



TRIVOR S3

3C1980

36-47



THOMSON SB FO E P CI WRU

3C060D

38-47



SINAI S1P

3C182T

36-47



KAMET S3 CI

3C122D

39-47



EIGER S3

3C022H

39-47





3PU PATENT

3RUN



SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*



TECHNOLOGY
3PU INJECTION SEQUENCES





BERG S3
39-47

3R171R



JARBO S3
36-47

3R453N



OSTRO S3
36-47

3R457N



OROSHI S1P
36-47

3R172T



FLOW SB FO E P CI WRU
36-47

3R022E



LIGHT SB FO E P CI WRU
36-47

3R198E





LIBECCIO S1P
36-47

3R085N



GHIBLI S1P
36-47

3R182T



HURRICANE S3
39-47

3R171V



SHAMAL S3
36-47

3R173O



BURAN S3
36-47

3R191O



CIENZO S3
36-47

3R198O



BEST SLIPPING RESISTANCE

KUBE



SRC
ANTI-SLIPPING SOLE

PERFECT GRIP

extra
LIGHT
shoes

ROOF GRIP UNI 11583:2015

COEFFICIENTE D'ATTRITO SECONDO LA PROVA UNI EN ISO 13287
FRICTION COEFFICIENT ACCORDING TO THE TEST UNI EN ISO 13287
ANTISTATIC PU/PU - DOUBLE DENSITY SOLE



ANTISHOCK

BENDING POINT

TILTED HEEL
TO IMPROVE THE WALKING

ANTI-SLIPPING HEEL



GOLF NEW S3
39-47



KU142EV



LIBRA NEW S3
36-49



KU149EV



MIAMI S1P
35-47

KU093N



RUGBY S3
36-47

KU025N



BASKET S3
36-47

KU037N





NORDIC S3
36-47

KU043N



BOXE S3
39-47

KU065N



KARATE S3
39-47

KU069N



perfect grip

KUBE



PERÙ S1P
34-47

KU095T



BOSTON S3
36-47

KU051L



DANCE S1P
35-42

KU055HF



Lady



PANAMA S1P
35-49

KU083T



KAYAK S3
36-47

KU025T



SOFTBALL S3
39-47

KU037T



VOLARE S3
36-47

KU474NA



YORK S3
35-49

KU061D



OXFORD S3
35-49

KU068D





TM



MEDINA S2

KU0020

35-47



VILNIUS S3

KU0250

36-47



FREE SB FO A E

KU0070

36-47



POLO S2

KU0021

34-49



STOCKHOLM S3

KU1911

36-47



HELSINKI SB FO A E

KU0071

36-47



BALTIC S2

KU0201

35-47



CONSTANTA S2

KU8801

37-47



ICEBERG S2 CI

KU0111


37-47



perfect grip


KUBE

ANTISTATIC PU/PU -
DOUBLE DENSITY SOLE
ERGO SAFE



SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*

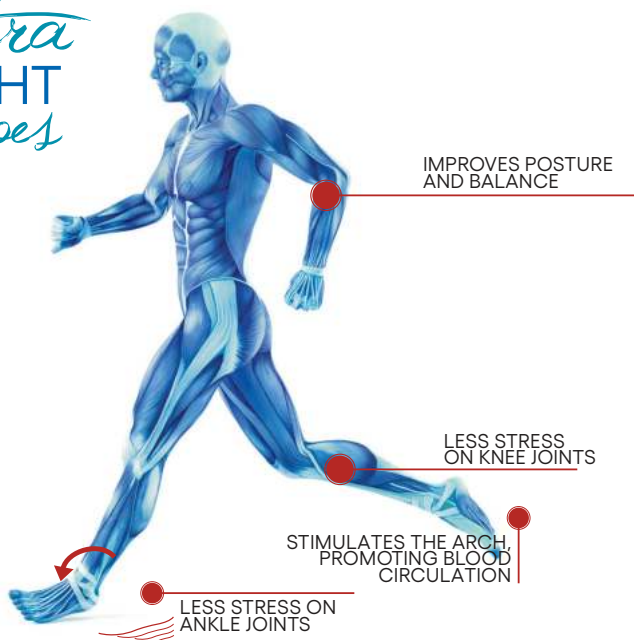



SANTA FE S1P

36-47



71T83C



SOCCER S3

36-47



ER025T



VOLLEYBALL S3

39-47



ER037T



HAITI S1P

36-47



71N93C



SPORT S3

36-47



73N25C



GYM S3

36-47



73N37C



LIMA S1P

36-47



71T95C



ARENDAL S2

36-47



72O02



BERGEN S2

36-47



72I02



ANTISTATIC PU/PU - DOUBLE DENSITY SOLE **STABILE**



SRC
ANTI-SLIPPING SOLE



KÖLN S3 CI WR
39-47

TO058L



DEFENDER S3 CI WR AN
39-47

TO159D



HANNOVER S3 CI WR
39-47

TO169N





ALASKA S3 CI WR TO084B
39-47



BILBAO S3 CI WR TO149G
39-47



DAKOTA S3 CI TO011D
39-47



TITAN S3 CI TO011G
39-47



MALAGA S3 TO061D
39-47



GRANADA S3 TO068D
39-47



STRAUSS S3 TO880BP
39-47



ANTISTATIC PU/PU -
DOUBLE DENSITY SOLE
ACTION



SRC
ANTI-SLIPPING SOLE



GULF S3
39-47


AC011A



BIG SIZE

KENT S3
36-51

AC061D



BIG SIZE

CAMBRIDGE S3
36-51

AC068D





HAMBURG S3 CI WR
36-49

AC058L



IRON RM S3
37-47

AC068DRM



SOLDADOR S3
39-47

AC880BSP



MOZART S3
36-49

AC810BP



VERDI S3
36-49

AC880BP




VERDI S3 R
39-47

AC880BRP



ANTISTATIC PU - RUBBER SOLE **HARD ROCK**

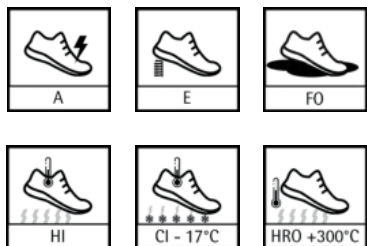


SRC
ANTI-SLIPPING SOLE



BENDING POINT

ANTI-SLIPPING HEEL

ANTISHOCK

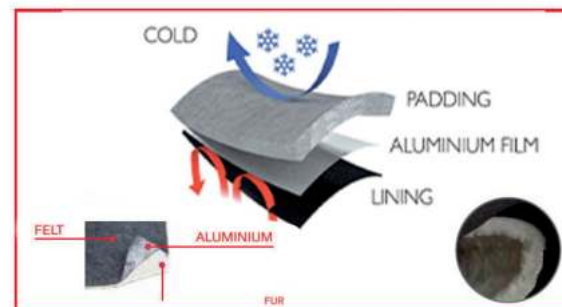

ANTIBACTERIAL TECHNOLOGY



CAIRO S3 CI HI HRO
39-47

HR068D



KIEL S3 CI HI WR HRO
37-48

HR058L



ALPI S3 CI HI WR HRO
37-47

HR058G



GENK S3 CI HI HRO
37-47

HR051L



WELDER S3L FO CI HI HRO SC SR
39-47

HR122D



ERCOLANO S3 HI HRO
39-47

HR066D





METATARSAL PROTECTION
protection resisting till 100 JOULE

M-PROTECTION S3 **HI** HRO M HR470EMR
39-47



WOODCUT S3 CI **HI** WR HRO (80236)
39-47



WINTER S3 CI **HI** WR HRO HR011L
39-47



ARTIC S3 CI **HI** WR HRO HR179E
39-47



QUEBEC S3 CI **HI** WR HRO HR178E
39-47



INSULATING PU/PU/PU SOLE
INSULATING PU / RUBBER SOLE

DIELECTRIC SOLE LINE



C.S.A. Z195-14

DIELECTRIC SOLE LINE exceeds requirements fixed from the Canadian norm CSA for electrical resistance. Determination of Electric Shock Resistance to a potential of **20.000 V** / 60 Hz, for a period of 1 min.



ASTM 2413 - 11

DIELECTRIC SOLE LINE exceeds requirements electrical resistance (EH) in accordance with ASTM 2413 - 11 electric hazard - Voltage: **20.000 V** / 60 Hz - duration: 1 min. - requirement of the electrical flow lower than 1.0 mA.



INSULATING SOLE FROM > 1000 MΩ

The bottom of the shoe, within some limits (no humidity, it does not concern the upper), offers electrical resistance against tension up to 1.000V - M Ω > 1.000



3RUN



FLOW SB FO E P CI WRU 3R022E
36-47



3RUN



LIGHT SB FO E P CI WRU 3R198E
36-47



HARD ROCK



SAMEL SB FO E P CI HI WRU HRO
HRD155D
38-47



3CROSS



THOMSON SB FO E P CI WRU
3C060D
38-47





VOLT SB FO E P HRO

39-47

HRD055H



HERTZ SB FO E P HRO

39-47

HRD154T



FRANKLIN SB FO E P CI HI WRU HRO

HRD052T

37-47



EDISON SB FO E P CI HI WRU HRO

HRD060D

37-48



TESLA SB FO E P CI HI WRU WR HRO

HRD057E

39-47



PROFESSIONAL *CITY*



NO METAL



MONDO POINT 11



A



E



FO


SRC
ANTI-SLIPPING SOLE

HIDDEN
OUTSOLE
TECHNOLOGY

TILTED HEEL
TO IMPROVE THE WALKING

BENDING POINT

ANTI-SLIPPING HEEL

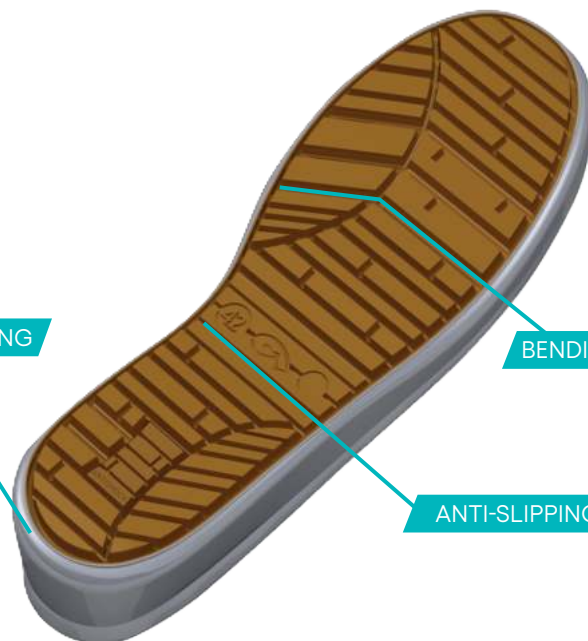



EAGLE O2 FO
36-47

C7004I



SNAKE O2 FO
36-47

C7181O



CITY



SPIDER O1P FO
36-47

C7154N



MALMO O2 FO CI
36-47

C7025O



LUTON O3 FO
36-47

C7068OC





1000
36-49



MEMORY
36-47



4000
35-47



5000
34-49



DIELECTRIC
37-47



GA514-10
110 cm



GA513-10
90 cm



DUFFLE BAG
CM 67X32X28



SB=



S1=SB+E+A+FO
CLOSED SEAT REGION



S1P=SB+E+A+P+FO



S2=S1+WRU



S3=S2+P+
CLEATED OUTSOLE



UNI EN ISO 20347:2012



OB=

basic requirement

O1=OB+E+A
CLOSED SEAT REGION



O1P=OB+E+A+P



O2=O1+WRU



O3=O2+P+
CLEATED OUTSOLE



SB=



S1=SB+E+A
CLOSED HEEL AREA



S1P=SB+E+A+P



S1PL=SB+E+A+PL



S1PS=SB+E+A+PS



S2=S1+WPA



S3=S2+P+
CLEATED OUTSOLE



S3L=S2+PL+
CLEATED OUTSOLE



S3S=S2+PS+
CLEATED OUTSOLE



S6=S2+WR



S7=S3+WR



S7L=S3L+WR



S7S=S3S+WR



roof certification
UNI 11583:2015


UK
CA marking UKCA
United Kingdom



USA STANDARD
astm 2413-18
IMPACT/COMPRESSION

NEW 20345:2022

20345:2012

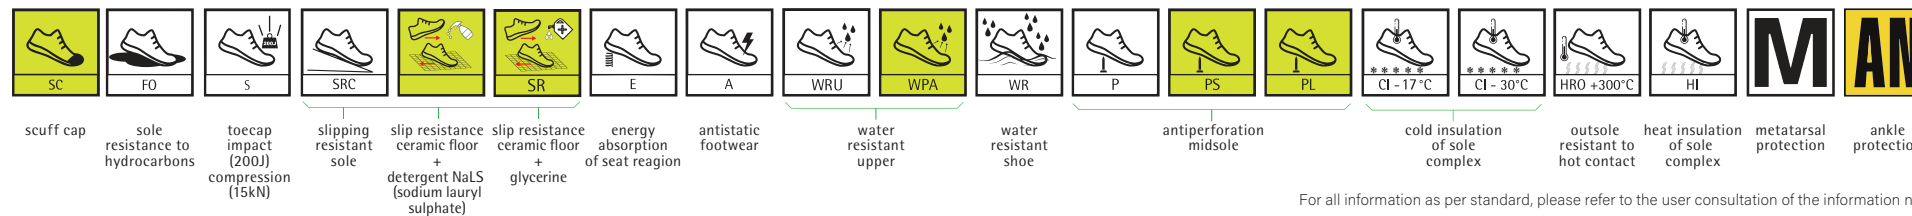

For all information as per standard, please refer to the user consultation of the information note



XSTICKER and XPEN
19x15,5 cm



XBAG SPORT
42x34 cm



COUNTER XDISPLAY



XBAG NYLON
50x30 cm



XCARPET
60x40 cm



XPOUF
35x35x35 cm



XTOTEM
156x57x21 cm



XEXPO
183x48x30 cm

3PU PATENT

BULTRA

page 6



**BULTRA
RUBBER**

page 8

3PU PATENT



3MOVE

page 10

3PU PATENT

3HYBRID

page 13

3PU PATENT

3CROSS

page 19

3PU PATENT

3RUN

page 22

KUBE

page 25

ERGO SAFE

page 30

STABILE

page 32

ACTION

page 34

HARD ROCK

page 36

DIELECTRIC LINE

page 39

CITY

page 42

ACCESSORIES

page 44

STANDARDS

page 45

ADVERTISING

page 46

1st edition - rev.2

GIASCO
SAFETY SHOES  TM



www.giasco.com

Via Zaupa, 50 • 36072 Chiampo (VI) - Italy
T. +39 0444 624477 • F. +39 0444 623085
E. giasco@giasco.com

